

# TA-22·22L

## Features

1. Easy to clean by removing the valve seat even if scale or dirt deposits on the valve disc or valve seat.
2. Can be installed in small space because of compact body.
3. Since the shapes of valve and float adopt Yoshitake unique structure, stable performance and sufficient exhaust capacity can be obtained.
4. Even if water leaks out of the TA-22 due to failure, it can be stopped immediately by tightening the end cap, ensuring safety.
5. Vinyl hose can be connected easily to the TA-22L.

## Specification

Application		Cold and hot water
Working pressure		0.01-1.0 MPa
Maximum temperature		100°C
Material	Body	Bronze
	Disc	FKM
	Seat	Brass
	Float	Heat-resistant resin
Connection	Inlet	JIS R screwed
	Outlet	TA-22: Cap type TA-22L: Hose joint type
Metal plating		Nickel-plated



TA-22


## Dimensions (mm) and Weights (g)

### ●TA-22

Nominal size	d	D	H	H <sub>1</sub>	H <sub>2</sub>	Weight
15A	R 1/2	13	92	19.5	58	360
20A	R 3/4	18	97.5	25	58	400
25A	R 1	23	100.5	28.5	57.5	460

### ●TA-22L

Nominal size	d	D	H	H <sub>1</sub>	H <sub>2</sub>	Weight
15A	R 1/2	13	96	19.5	58	360
20A	R 3/4	18	101.5	25	58	400
25A	R 1	23	104.5	28.5	57.5	460

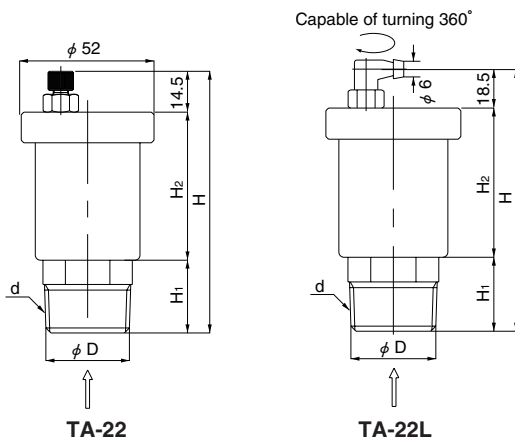

## Exhaust Capacity Chart

